


AC Series F.R.L(AF,AR,AL Combination)

订购代号 / Ordering Code

AC	3000	-	03	D
Air Combination	Specification 2000 2500 3000 4000 5000		Port Size 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1 "	Drian Type Blank:Differential Drain D:Automatic Drain



图形符号 / Graphic symbol




规格 / Specification


型号/Model		AC2000-01	AC2000-02	AC2500-02	AC2500-03	AC3000-02	AC3000-03	AC4000-03	AC4000-04	AC4000-06	AC5000-06	AC5000-10	
Rated Flow Rate		500	500	1500	1500	2000	2000	4000	4000	4500	5000	5000	
Port Size		G1/8	G1/4	G1/4	G3/8	G1/4	G3/8	G3/8	G1/2	G3/4	G3/4	G1	
Filter Element Precision		25μ											
Max. Working Pressure		1.0MPa											
Proof Pressure		1.5MPa											
Working Temperature		5 - 60℃											
Range of Adjustable Pressure		0.05 - 0.85MPa											
Suggested Lubrication		ISO VG 32											
Container Material		聚碳酸酯/Polycarbonate											
Protective Cover		无/Not Available			有/Available								
Drain Function Type		差压放水/Differential Drain			差压放水、自动放水/Differential Drain, Automatic Drain								
Valve Type		带溢流型/With Overflow											
Assembly	Filter	AF2000-01	AF2000-02	AF3000-02	AF3000-03	AF3000-02	AF3000-03	AF4000-03	AF4000-04	AF4000-06	AF5000-06	AF5000-10	
	Regulator	AR2000-01	AR2000-02	AR2500-02	AR2500-03	AR3000-02	AR3000-03	AR4000-03	AR4000-04	AR4000-06	AR5000-06	AR5000-10	
	Lubricator	AL2000-01	AL2000-02	AL3000-02	AL3000-03	AL3000-02	AL3000-03	AL4000-03	AL4000-04	AL4000-06	AL5000-06	AL5000-10	

外形尺寸/Overall Dimension

TYPE: AC2000





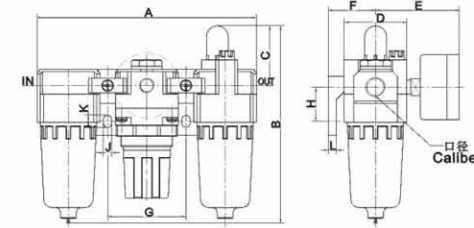


TYPE: AC2500-5000





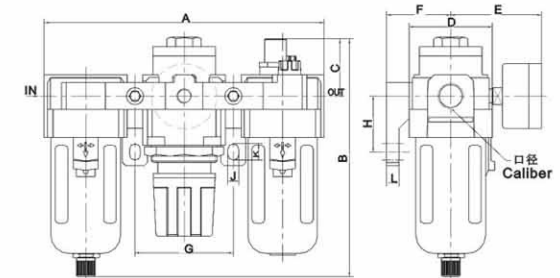


型号 Model	口径 Bore	A	B	C	D	E	F	G	H	J	K	L
AC2000	1/4	140	125	38	40	56.8	30	50	24	5.5	8.5	5
AC2500	1/4 • 3/8	181	156.5	38	53	60.8	41	64	35	7	11	7
AC3000	1/4 • 3/8	181	156.5	38	53	60.8	41	64	35	7	11	7
AC4000	3/8 • 1/2	238	191.5	41	70	65.5	50	84	40	9	13	7
AC4000-06	3/4	253	193	40.5	70	69.5	50	89	40	9	13	7
AC5000	3/4 • 1	300	271.5	48	90	75.5	70	105	50	12	16	10

压力特性/ Pressure Character

进口压力 = 0.7MPa 出口压力 = 0.2MPa 流量 = 20L/min
Supply Pressure=0.7MPa Secondary Pressure=0.2MPa Flow=20L/min

流量特性/ Flowing Character

进口压力 = 0.7MPa
Supply Pressure=0.7MPa


AC Series FR.L(AW,AL Combination)

订购代号 / Ordering Code

AC	4010	-	04	D
Air Combination	Specification 2010 3010 4010 5010		Port Size 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"	Drain Type Blank:Differential Drain D:Automatic Drain



图形符号 / Graphic symbol




规格 / Specification


型号/Model		AC2010-01	AC2010-02	AC3010-02	AC3010-03	AC4010-03	AC4010-04	AC4010-06	AC5010-06	AC5010-10
Rated Flow Rate		500	500	1700	1700	3000	3000	3000	4000	4000
Port Size		G1/8	G1/4	G1/4	G3/8	G3/8	G1/2	G3/4	G3/4	G1
Filter Element Precision		25μ								
Max. Working Pressure		1.0MPa								
Proof Pressure		1.5MPa								
Working Temperature		5 ~ 60℃								
Range of Adjustable Pressure		0.05 ~ 0.85MPa								
Suggested Lubrication		ISO VG 32								
Container Material		聚碳酸酯/Polycarbonate								
Protective Cover		无/Not Available			有/Available					
Drain Function Type		差压放水/Differential Drain			差压放水、自动放水/Differential Drain、Automatic Drain					
Valve Type		带溢流型/With Overflow								
Assembly	Filter	AW2000-01	AW2000-02	AW3000-02	AW3000-03	AW4000-03	AW4000-04	AW4000-06	AW5000-06	AW5000-10
	Lubricator	AL2000-01	AL2000-02	AL3000-02	AL3000-03	AL4000-03	AL4000-04	AL4000-06	AL5000-06	AL5000-10

外形尺寸/Overall Dimension

TYPE: AC2010

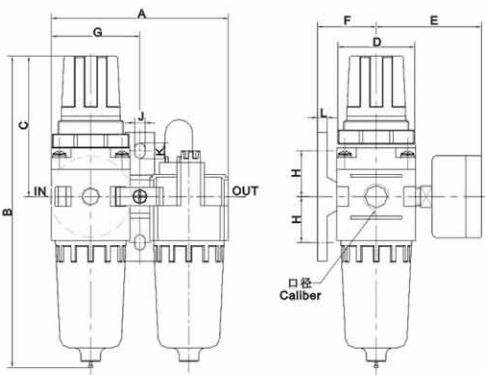

TYPE: AC3010-5010

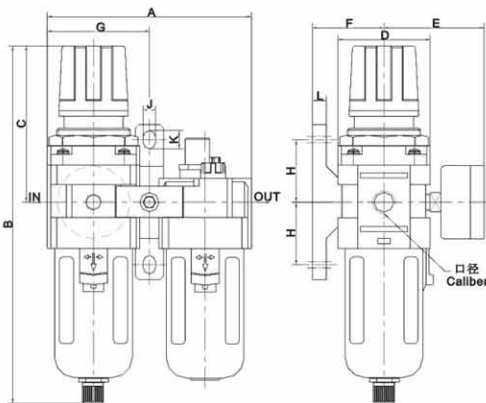

型号 Model	口径 Bore	A	B	C	D	E	F	G	H	J	K	L
AC2010	1/4	90	164.5	78	40	56.8	30	45	24	5.5	8.5	5
AC3010	1/4 • 3/8	117	211	92.5	53	60.8	41	58.5	35	7	11	7
AC4010	3/8 • 1/2	154	262.5	112	70	70.5	50	77	40	9	13	7
AC4010-06	3/4	164	267	114	70	70.5	50	82	40	9	13	7
AC5010	3/4 • 1	195	338	116	90	75.5	69.8	97.5	50	11.5	15	10.5


AW Series Filter & Regulator

订购代号 / Ordering Code

AW	3000	-	03	D
Filter&Regulator	Specification 2000 3000 4000 5000		Port Size 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"	Drian Type Blank:Differential Drain D:Automatic Drain



图形符号 / Graphic symbol




规格 / Specification


型号/Model	AW2000-01	AW2000-02	AW3000-02	AW3000-03	W4000-03	AW4000-04	AW4000-06	AW5000-06	AW5000-10
Rated Flow Rate	550	550	2000	2000	4000	4000	4500	5500	5500
Port Size	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2	G3/4	G3/4	G1
Filter Element Precision	25 μ								
Range of Adjustable Pressure	0.05 ~ 0.85MPa								
Max. Adjustable Pressure	1.0MPa								
Proof Pressure	1.5MPa								
Working Temperature	5 ~ 60℃								
Container Material	聚碳酸酯/Polycarbonate								
Protective Cover	无/Not Available			有/Available					
Drain Function Type	差压放水/Differential Drain			差压放水、自动放水/Differential Drain, Automatic Drain					
Valve Type	带溢流型/With Overflow								

外形尺寸/Overall Dimension

TYPE: AW2000

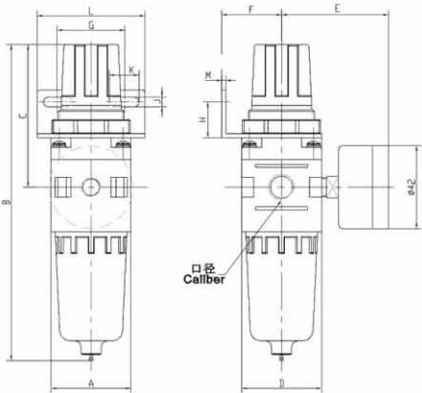


TYPE: AW3000-4000

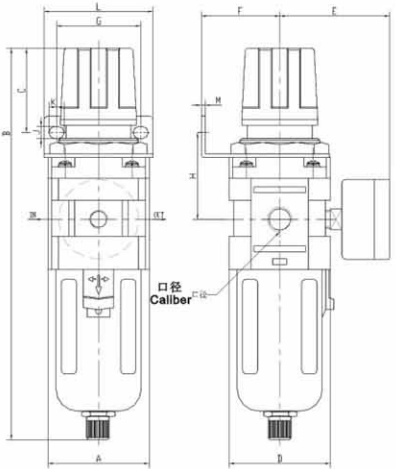

型号 Model	口径	A	B	C	D	E	F	G	H	J	K	L
AW2000	1/4	40	164.5	78	40	56.8	30	34	45	5.4	15.4	55
AW3000	1/4 • 3/8	53	211	92.5	53	60.8	41	40	46	6.5	8.0	53
AW4000	1/4 • 3/8	70	262.5	112	70	70.5	50	54	54	8.5	10.5	70
AW4000-06	3/4	75	267	114	70	70.5	50	54	56	8.5	10.5	70
AW5000	3/4 • 1	90	338	116	90	80.5	50	54	60	10	11	91


压力特性/ Pressure Character

进口压力 = 0.7MPa 出口压力 = 0.2MPa 流量 = 20L/min
Supply Pressure=0.7MPa Secondary Pressure=0.2MPa Flow=20L/min

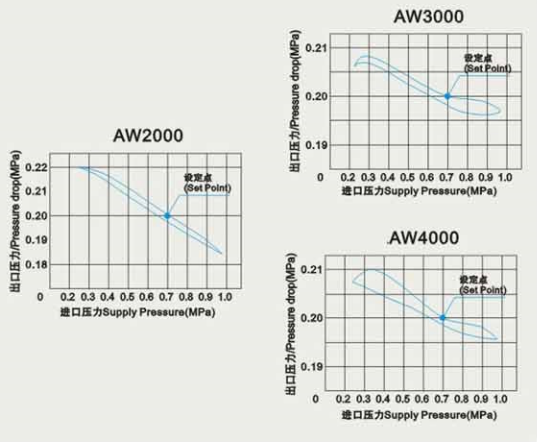

流量特性/ Flowing Character

进口压力 = 0.7MPa
Supply Pressure=0.7MPa

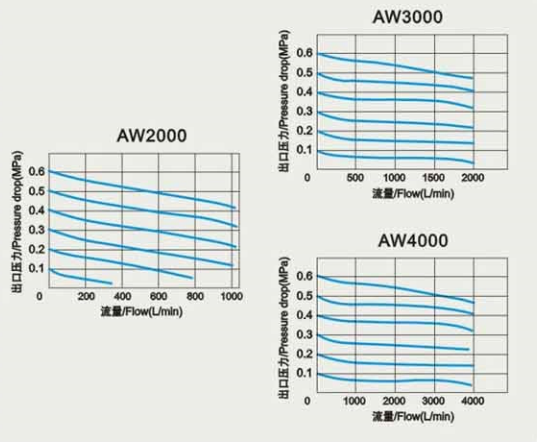


AR Series Regulator

订购代号 / Ordering Code

AR	3000	-	03
Regulator	Specification Code 2000 2500 3000 4000 5000		Port Size 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"



图形符号 / Graphic symbol




规格 / Specification

型号/Model	AR2000-01	AR2000-02	AR2500-02	AR2500-03	AR3000-02	AR3000-03	AR4000-03	AR4000-04	AR4000-06	AR5000-06	AR5000-10
Rated Flow	550	550	2000	2000	2500	2500	6000	6000	6000	8000	8000
Port Size	G1/8	G1/4	G1/4	G3/8	G1/4	G3/8	G3/8	G1/2	G3/4	G3/4	G1
Range of Adjustable Pressure	0.05 ~ 0.85MPa										
Max. Adjustable Pressure	1.0MPa										
Proof Pressure	1.5MPa										
Working Temperature	5 ~ 60℃										
Valve Type	带溢流型/With Overflow										

外形尺寸/Overall Dimension


TYPE: AR2000-5000

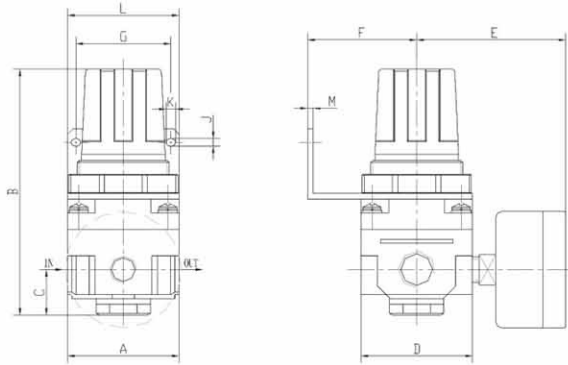

型号 Model	口径 Bore	A	B	C	D	E	F	G	H	J	K	L
AR2000	1/4	40	95	17	40	56.8	30	34	45	5.4	15.4	55
AR2500	1/4	53	102.5	25	48	60.8	30	34	44	5.4	15.4	55
AR3000	1/4 • 3/8	53	127.5	35	53	60.8	41	40	46	6.5	8.0	53
AR4000	3/8 • 1/2	70	149.5	37.5	70	65.5	50	54	54	8.5	10.5	70
AR4000-06	3/4	75	154.5	40.5	70	69.5	50	54	56	8.5	10.5	70
AR5000	3/4 • 1	90	168	48	90	75.5	70	66	65.8	11	13	90


压力特性/ Pressure Character

进口压力 = 0.7MPa 出口压力 = 0.2MPa 流量 = 20L/min
Supply Pressure = 0.7MPa Secondary Pressure = 0.2MPa Flow = 20L/min

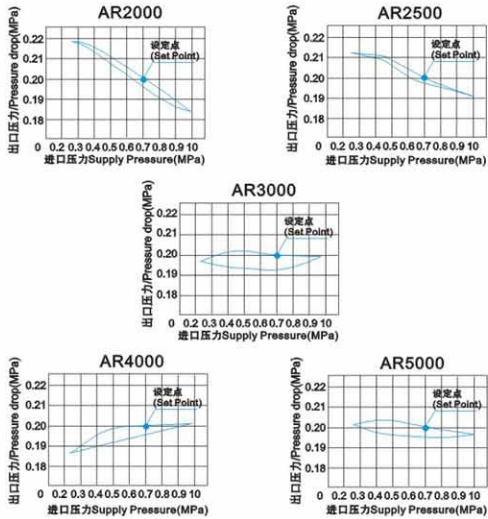

流量特性/ Flowing Character

进口压力 = 0.7MPa
Supply Pressure = 0.7MPa

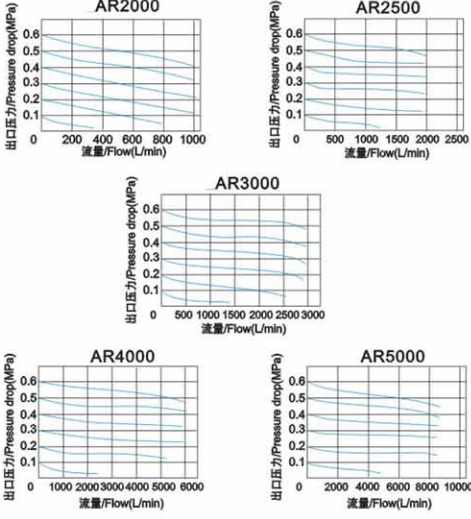


AF Series Filter

订购代号 / Ordering Code

AF	3000	- 03	D
Filter	Specification 2000 3000 4000 5000	Port Size 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"	Drian Type Blank:Differential Drain D:Automatic Drain



图形符号 / GraPhic symbol




规格 / Specification


型号/Model	AF2000-01	AF2000-02	AF3000-02	AF3000-03	AF4000-03	AF4000-04	AF4000-06	AF5000-06	AF5000-10
Rated Flow Rate	750	750	1500	1500	4000	4000	6000	7000	7000
Port Size	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2	G3/4	G3/4	G1
Filter Element Precision	25 μ								
Max. Adjustable Pressure	1.0MPa								
Proof Pressure	1.5MPa								
Working Temperature	5~60℃								
Container Material	聚碳酸酯/Polycarbonate								
Protective Cover	无/Not Available		有/Available						
Drain Function	差压放水/Differential Drain		差压放水、自动放水/Differential Drain, Automatic Drain						

外形尺寸/Overall Dimension


TYPE: AF2000



TYPE: AF3000-4000








TYPE: AF5000



型号 Model	口径 Bore	A	B	C	D	E	F	G	H	J	K	L
AF2000	1/4	40	97.5	11	40	17	30	27	22	5.4	8.4	40
AF3000	1/4 • 3/8	53	132.5	14	53	16	41	40	23	6.5	8.0	53
AF4000	3/8 • 1/2	70	168.5	18	70	17	50	54	26	8.5	10.5	70
AF4000-06	3/4	75	172.5	20	70	14	50	54	25	8.5	10.5	70
AF5000	3/4 • 1	90	247.5	24	90	23	70	60	35	11	13	90

压力特性/ Pressure Character



AL Series Lubricator

订购代号 / Ordering Code

AL	3000	-	03
Lubricator	Specification 2000 3000 4000 5000		Port Size 01:G1/8" 02:G1/4" 03:G3/8" 04:G1/2" 06:G3/4" 10:G1"



图形符号 / Graphic symbol




规格/Specification


型号/Model	AL2000-01	AL2000-02	AL3000-02	AL3000-03	AL4000-03	AL4000-04	AL4000-06	AL5000-06	AL5000-10
Rated Flow Rate	800	800	1700	1700	5000	5000	6300	7000	7000
Port Size	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2	G3/4	G3/4	G1
Max. Adjustable Pressure	1.0MPa								
Proof Pressure	1.5MPa								
Working Temperature	5~60℃								
Suggested Lubrication	ISO VG 32								
Container Material	聚碳酸酯/Polycarbonate								
Protective Cover	无/Not Available				有/Available				

外形尺寸/Overall Dimension


TYPE: AL2000



TYPE: AL3000-4000








TYPE: AL5000-6000

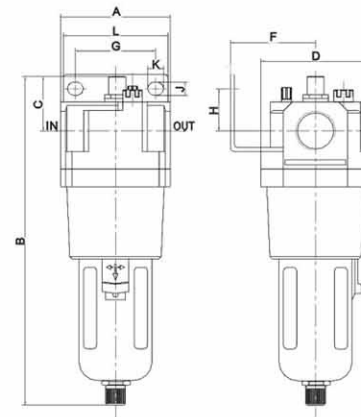

型号 Model	口径 Bore	A	B	C	D	F	G	H	J	K	L
AL2000	1/4	40	122	38	40	30	27	22	5.4	8.4	40
AL3000	1/4 • 3/8	53	142	38	53	41	40	23	6.5	8.0	53
AL4000	3/8 • 1/2	70	177	41	70	50	54	26	8.5	10.5	70
AL4000-06	3/4	75	177	39	70	50	54	25	8.5	10.5	70
AL5000	3/4 • 1	90	254	45	90	70	66	35	11	13	90

流量特性/Flowing Character



AFC/BFC Series

FR.L Combination




订购代号 / Ordering Code

BFC 3000 - D




Type	Port Size	Drian Type
AFC: Small Size	1500: G1/8"	Blank:Differential Drain
BFC: Middle Size	2000:G1/4"	D:Automatic Drain ■
	3000:G3/8"	
	4000:G1/2"	

图形符号 / GraPhic symbol



规格 / Specification

TYPE:AFC

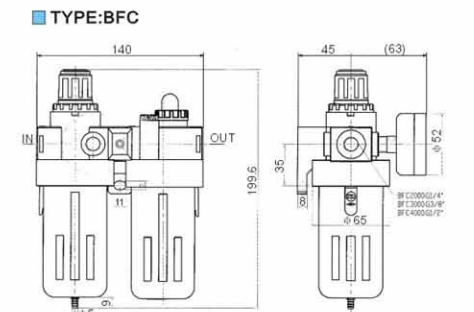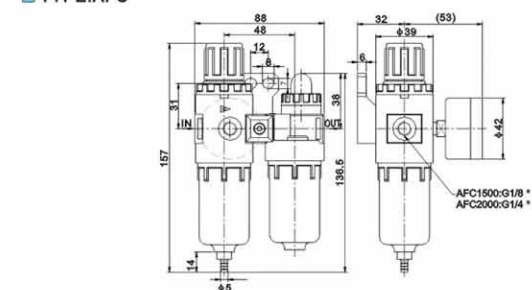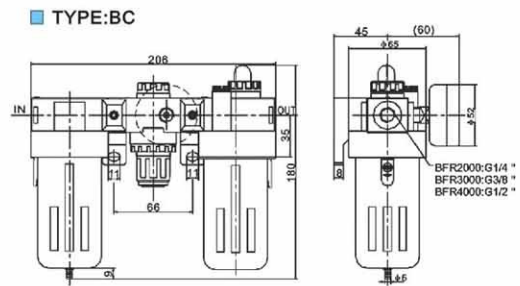

压力特性/ Pressure Character

Figure 10 consists of two line graphs side-by-side. The left graph is for AC1500(2000) and the right graph is for BC2000(3000, 4000). Both graphs plot Secondary Pressure (MPa) on the y-axis against Supply Pressure (MPa) on the x-axis. The y-axis ranges from 0.18 to 0.22 MPa, and the x-axis ranges from 0 to 1.0 MPa. Each graph shows a blue curve that starts at approximately 0.21 MPa at 0.2 MPa supply pressure, peaks at about 0.215 MPa at 0.3 MPa supply pressure, and then declines. A red dot on each curve marks the 'Set Point' at approximately 0.7 MPa supply pressure and 0.19 MPa secondary pressure.

规格 / Specification

压力特性/ Pressure Character

AFC1500(2000)

BFC2000(3000、4000)

AFC1500(2000)

出口圧力(Pressure drop)(Pa)

流量Flow(L/min)

BFC2000(3000, 4000)

出口圧力(Pressure drop)(Pa)

流量Flow(L/min)

AFR / BFR Series Filter & Regulator




订购代号 / Ordering Code

BFR 3000 - D


Type	Port Size	Drian Type
AFR: Small Size	1500: G1/8"	Blank: Differential Drain
BFR: Middle Size	2000: G1/4"	D: Automatic Drain
	3000: G3/8"	
	4000: G1/2"	

图形符号 / Graphic symbol




外形尺寸/Overall Dimension

TYPE: AFR

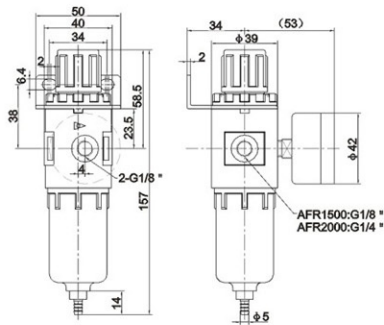

TYPE: BFR

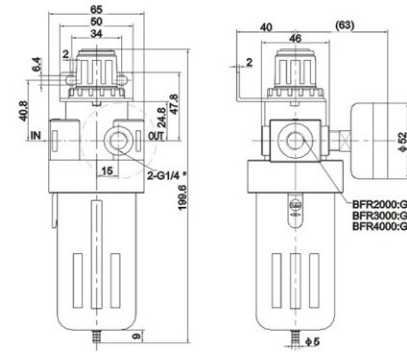


规格 / Specification


型号/Model		AFR1500	AFR2000	BFR2000	BFR3000	BFR4000
Working Medium		空气/Air				
Port Size		G1/8	G1/4	G1/4	G3/8	G1/2
Filter Element Precision		40μ				
Range of Adjustable Pressure		0.05~0.85MPa				
Max. Adjustable Pressure		0.95MPa				
Proof Pressure		1.5MPa				
Working Temperature		5~60℃				
Drain Bowl Capacity		15cc		60cc		
Weight		0.26Kg		0.4Kg		
Material	Body	铝合金压铸成型/Aluminum Die-casting Forming				
	Drain Bowl	PE				
	Bowl Cover				铁/Iron	

压力特性/ Pressure Character

AFR1500(2000)




BFR2000(3000, 4000)




流量特性/ Flowing Character

AFR1500(2000)



BFR2000(3000, 4000)



AL/BL Series Lubricator



订购代号 / Ordering Code

BL 3000


Type	Port Size
AL: Small Size	1500: G1/8"
BL: Middle Size	2000: G1/4"
	3000: G3/8"
	4000: G1/2"

图形符号 / Graphic symbol




外形尺寸/Overall Dimension

TYPE: AL 1500(2000)

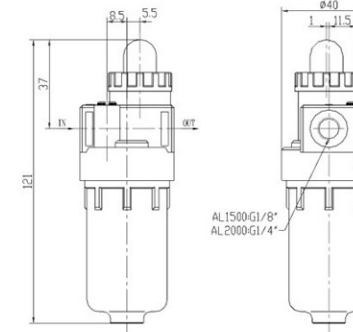

TYPE: BL 2000(3000, 4000)

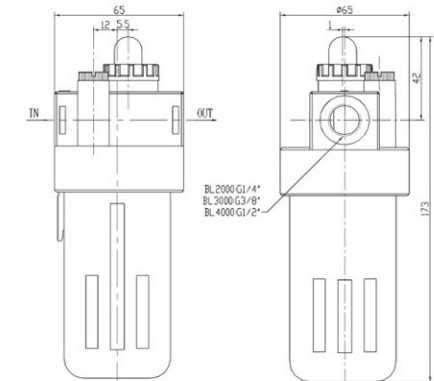


规格 / Specification


型号/Model		AL1500	AL2000	BL2000	BL3000	BL4000
Working Medium		空气/Air				
Port Size		G1/8	G1/4	G1/4	G3/8	G1/2
Proof Pressure		1.5MPa				
Working Temperature		5 ~ 60℃				
Oil Bowl Capacity		25cc		90cc		
Suggested Lubrication		ISO VG32或同级用油/ISO VG32 or Same Grade Oil				
Weight		0.5Kg			0.7Kg	
Material	Body	铝合金压铸成型/Aluminum Die-casting Forming				
	Oil Bowl	PE				
	Bowl Cover	-			铁/Iron	

流量特性/ Flowing Character

AL1500(2000)



BL2000(3000, 4000)



AF / BF Series Filter




订购代号 / Ordering Code

BF 3000 - D


Type	Port Size	Drain Type
AF: Small Size	1500: G1/8"	Blank: Differential Drain
BF: Middle Size	2000: G1/4"	D: Automatic Drain
	3000: G3/8"	
	4000: G1/2"	

图形符号 / Graphic symbol




规格 / Specification

TYPE: AF

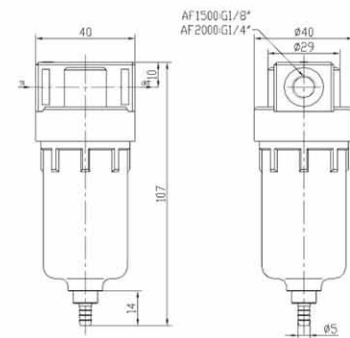

TYPE: BF

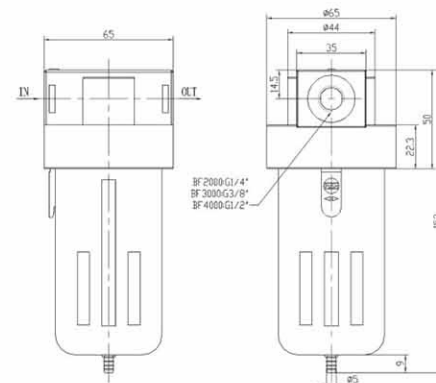


规格 / Specification


型号/Model		AF1500	AF2000	BF2000	BF3000	BF4000
Working Medium		空气/Air				
Port Size		G1/8	G1/4	G1/4	G3/8	G1/2
Filter Element Precision		40μ				
Proof Pressure		1.5MPa				
Working Temperature		5~60℃				
Drain Bowl Capacity		15cc		60cc		
Weight		0.14Kg		0.33Kg		
Material	Body	铝合金压铸成型/Aluminum Die-casting Forming				
	Drain Bowl	PE				
	Bowl Cover	-		铁/Iron		

流量特性 / Flowing Character

AF1500(2000)



BF2000(3000、4000)



AR / BR Series Regulator




订购代号 / Ordering Code

BR 3000


Type	Port Size
AR: Small Size	1500: G1/8"
BR: Middle Size	2000: G1/4"
	3000: G3/8"
	4000: G1/2"

图形符号 / Graphic symbol




外形尺寸 / Overall Dimension

TYPE: AR 1500(2000)

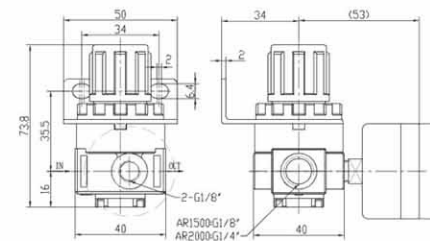

TYPE: BR 2000(3000、4000)

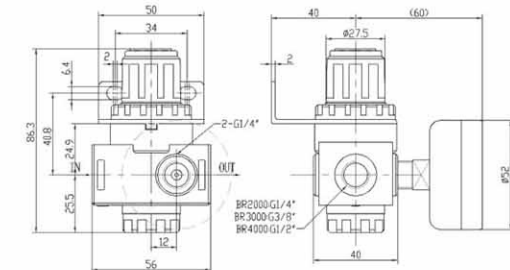


规格 / Specification


型号/Model	AR1500	AR2000	BR2000	BR3000	BR4000
Working Medium	空气/Air				
Port Size	G1/8	G1/4	G1/4	G3/8	G1/2
Range of Adjustable Pressure	0.05 ~ 0.85MPa				
Max. Adjustable Pressure	0.95MPa				
Proof Pressure	1.5MPa				
Working Temperature	5 ~ 60℃				
Weight	0.20Kg		0.23Kg		
Material of Body	铝合金压铸成型/Aluminum Die-casting Forming				

压力特性 / Pressure Character

AR1500(2000)




BR2000(3000、4000)




流量特性 / Flowing Character

AR1500(2000)



BR2000(3000、4000)

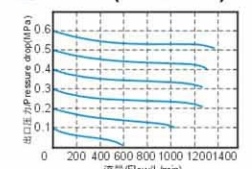


PTH Series Air Filter,Regulator,Lubricator



订购代号 / Ordering Code

R07	-	200
Model		Port Size
R07: Regulator		100: 1/8"
B07: Filter & Regulator		200: 1/4"
L07: Micro type Lubricator		
P1H/PTH: Filter, Regulator & Lubricator		

Symbol

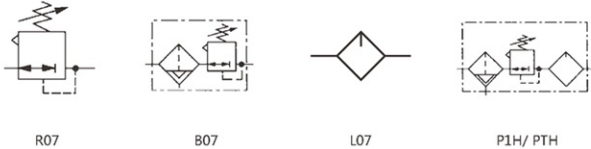

规格/Specification

Model	R07	B07	L07	P1H/PTH
Working fluid	Air			
Inlet port pressure	0~10bar	0~10bar(transparent cup)	Transparent cup:6.3bar	0~10bar
Pressure gauge port	Rc1/8			
Ambient temperature	-20~50°C	Transparent cup:-20~50°C	-	-
Body Material	Aluminium			

AD Series Auto-Drain



订购代号 / Ordering Code

AD	400	-	08
Model	Series		Inlet Port size
AD: Auto-drain	400: 400 series		08: PT1/4"
			10: PT3/8"
			15: PT1/2"

Examples

1. Ordering code for ordering with inlet port PT 1/4, outlet port PT 1/4 auto-drain is AD400-08.
2. Order code for ordering with inlet port PT 1/2, out let port PT 3/8 auto drain is AD400-15.


Symbol



规格 / Specification

Model	AD400-08	AD400-10	AD400-15
Working medium	Air		
Inlet port size	PT1/4	PT3/8	PT1/2
Outlet port size	PT1/4	PT1/4	PT3/8
Proof pressure	1.5MPa		
Max. test pressure	1.0MPa		
Ambient Temperautre range	5~60°C		

外形尺寸/Overall Dimension

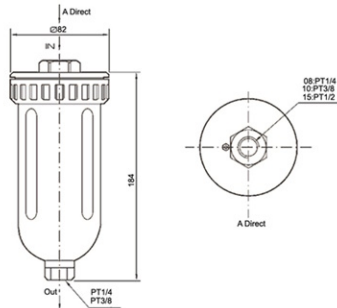

SFC Series FR.L (filter regulator & lubricator combination)



SFC-200A




SFC-200

订购代号 / Ordering Code

SFC	-	200
Model	-	Port Size
SFC: FR.L		200:G1/4"
		300:G3/8"
		400:G1/2"

Symbol:




The product have the function of filter, regulator and lubricator. It's structure tightly, flow rate largely, output steadily and installation simply. The element has pressure gange, installation stand and lubricator. The lubricator can non-stop gas. All have the cup shape protect cover. Use safe and appearance beautifully.

规格/Specification

Model	SFC-200	SFC-300	SFC-400
Port size	G1/4"	G3/8"	G1/2"
Port size of gauge	G1/8"	G1/8"	G1/8"
Max. proof pressure		1.5MPa	
Max. working pressure		1MPa	
Environment & fluid temperature		5~60°C	
Protective cover		Available	

外形尺寸/Overall Dimension

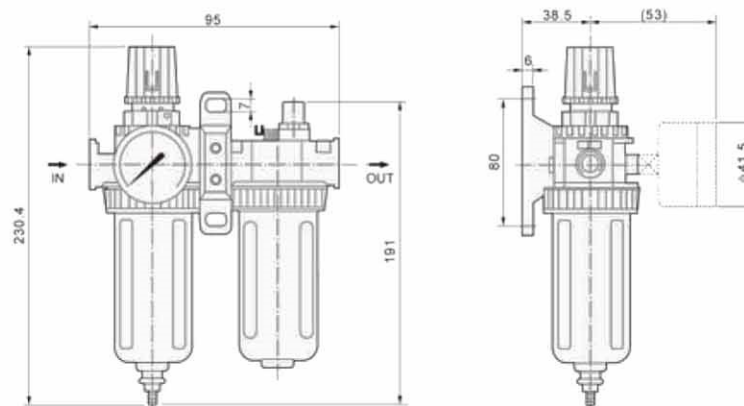

SL Series Lubricator



订购代号 / Ordering Code

SL	-	200
Model	-	Port Size
SL: lubricator		200:G1/4"
		300:G3/8"
		400:G1/2"


Symbol:



规格/Specification

Model	SL-200	SL-300	SL-400
Port size	G1/4"	G3/8"	G1/2"
Max. proof pressure		1.5MPa	
Max. working pressure		1.0MPa	
Ambient temperature		5~60°C	
Protective cover		Available	

外形尺寸/Overall Dimension

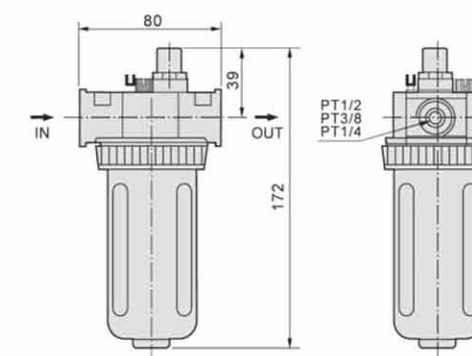


SFR Series Regulator & Filter



订购代号 / Ordering Code


SFR	-	200
Model	-	Port Size
SFR:regulator & filter		200:G1/4"
		300:G3/8"
		400:G1/2"

Symbol:



规格/Specification

Model	SFR-200	SFR-300	SFR-400
Port size	G1/4"	G3/8"	G1/2"
Port size of gauge	G1/8"	G1/8"	G1/8"
Max. proof pressure		1.5MPa	
Max. working pressure		1.0MPa	
Ambient temperature		5~60°C	
Protective cover		Available	

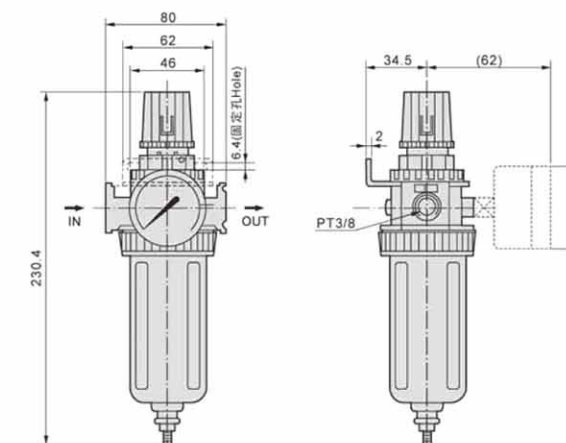

QSLH Series

High Pressure Filter




订购代号 / Ordering Code

QSLH - 15

Type
High Pressure Filter



Port Size
08: G1/4"
10: G3/8"
15: G1/2"
20: G3/4"
25: G1"

图形符号 / Graphic symbol



外形尺寸/Overall Dimension

TYPE:QTYH-20、25

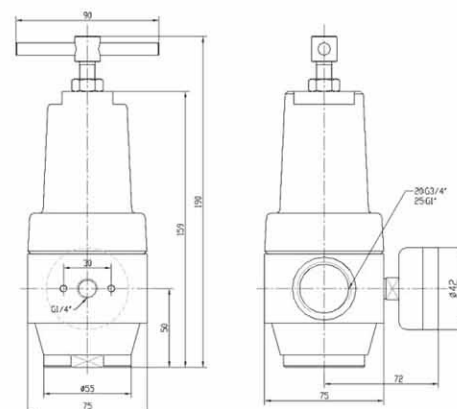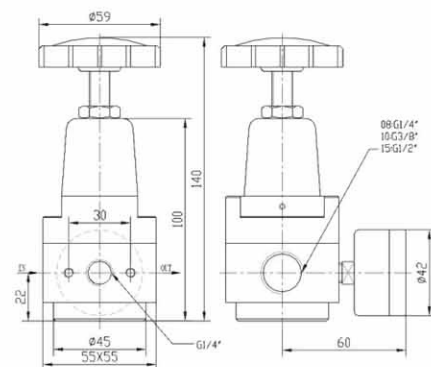

规格/Specification

型号/Model	QSLH-08	QSLH-10	QSLH-15	QSLH-20	QSLH-25
Working Medium	Air				
Port Size	G1/4	G3/8	G1/2	G3/4	G1
Filter Element Precision	25 ~ 50 μ				
Water Separation Efficiency	≥80%				
Max. Working Pressure	4MPa				
Working Temperature Range	5 ~ 80℃				


QTY Series Pressure Regulator



订购代号 / Ordering Code

QTY	-	10
Model	-	Port Size
QTY: regulator	-	8:G1/4"
	-	10:G3/8"
	-	15:G1/2"
	-	20:G3/4"
	-	25:G1"
	-	40:G 1 1/2"


Symbol:



规格/Specification

型号/Model	QTY-8	QTY-10	QTY-15	QTY-20	QTY-25	QTY-40
Working Medium	Air					
Port Size	G1/4	G3/8	G1/2	G3/4	G1	G1 1/2
Range of Adjustable Pressure	0.05~0.63MPa					
Max. Output Pressure	0.63MPa					
Delivery Pressure	1.0MPa					
Ambient Temperature	5~60°C					

外形尺寸/Overall Dimension

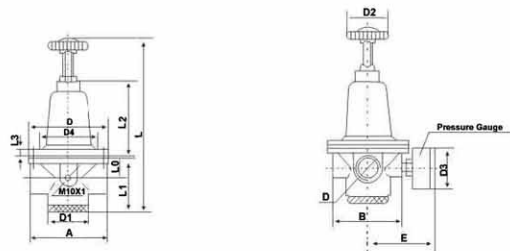

型号 Model	Port Size	A	B	D	D1	D2	D3	D4	L0	L1	L2	L3	E	Lmax
QTY-8	G1/4	74	64	φ80	φ34	φ60	φ58	φ60	16	52	69	8	80	173
QTY-10	G3/8	74	64	φ80	φ34	φ60	φ58	φ60	16	52	69	8	80	173
QTY-15	G1/2	74	64	φ80	φ44	φ60	φ58	φ60	21	58	69	8	80	181
QTY-20	G3/4	109	13	φ120	φ60	φ90	φ58	φ90	30	78	108	9	100	250
QTY-25	G1	109	113	φ120	φ60	φ90	φ58	φ90	30	78	108	9	100	250
QTY-40	G1 1/2	136	104	φ120	φ60	φ90	φ58	φ90	40	100	108	9	100	280


QSL Series Air Filter




订购代号 / Ordering Code

QSL	-	10
Model	-	Port Size
QSL: air filter	-	8:G1/4"
	-	10:G3/8"
	-	15:G1/2"
	-	20:G3/4"
	-	25:G1"
	-	40:G 1 1/2"

Symbol:



外形尺寸/Overall Dimension

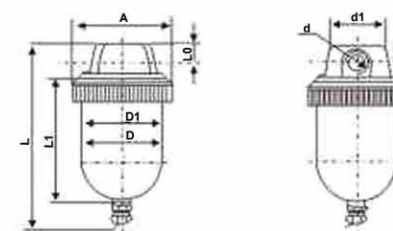

Model	Port Size(d)	A	D	D1	d1	L0	L1	L
QSL-8	G1/4							
QSL-10	G3/8	90	φ70	φ88	φ55	14	114	160
QSL-15	G1/2							
QSL-20	G3/4	115	φ90	φ110	φ66	21	151	215
QSL-25	G1							
QSL-40	G1 1/2	132	φ90	φ130	φ92	32	228	310


QIU Series Lubricator




订购代号 / Ordering Code

QIU	-	10
Model	-	Port Size
QIU: lubricator	-	8:G1/4"
	-	10:G3/8"
	-	15:G1/2"
	-	20:G3/4"
	-	25:G1"
	-	40:G 1 1/2"

Symbol:



外形尺寸/Overall Dimension

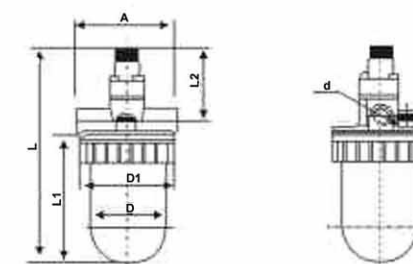

Model	Port Size(d)	A	D	D1	L1	L2	L
QIU-8	G1/4						
QIU-10	G3/8	90	70	88	114	69	220
QIU-15	G1/2						
QIU-20	G3/4	115	90	110	151	74	250
QIU-25	G1						
QIU-40	G1 1/2	130	90	110	163	60	245